

«REGAL»

# NETWORK SOLUTIONS

Product Guide



COMPLETE SECURITY SOLUTIONS AT [WWW.REGALSEcurity.CO.ZA](http://WWW.REGALSEcurity.CO.ZA)



## Outdoor Wireless

## Wi-Fi 4 (802.11n)



WIS-Q2300A

**2.4GHz Outdoor Wireless CPE 300Mbps**

- 10dBi Directional Antenna
- 23dBm 2 x 2 Radio
- 1 x 10/100Mbps Ethernet Port
- Throughput: Up to 300Mbps



NW205 WIS-Q450

**5GHz Outdoor Wireless CPE 433Mbps**

- 14dBi Directional Antenna
- 23dBm 1 x 1 Radio
- 1 x 10/100Mbps Ethernet Port
- Throughput: Up to 433Mbps



NW202 WIS-Q800P

**5GHz Outdoor Wireless CPE 867Mbps**

- 16dBi Directional Antenna
- 26dBm 2 x 2 Radio
- 1 x Gbps Ethernet Port
- Throughput: Up to 867Mbps



NW210 WIS-S800AC

**5GHz 867Mbps Outdoor Wireless Hi-Power Base Station**

- Seamlessly integrates with all Wisnetworks Antennas
- 27dBm 2 x 2 Radio
- 1 x Gbps Ethernet Port
- Throughput: Up to 867Mbps



NW230 WIS-S516AC

**5GHz 867Mbps 120° Outdoor Wireless Base Station**

- 16dBi 120 Degree Directional Antenna
- 27dBm 2 x 2 Radio
- 1 x Gbps Ethernet Port
- Throughput: Up to 867Mbps

## Wi-Fi 5 (802.11ac)



NW220-1 WIS-D523

**5GHz Outdoor Wireless Dish CPE/Bridge 433Mbps**

- 23dBi Directional Antenna
- 20dBm 1 x 1 Radio
- 1 x 10/100Mbps Ethernet Port
- Throughput: Up to 433Mbps



NW231 WIS-D523AC

**5GHz Outdoor Wireless Dish CPE/Bridge 867Mbps**

- 23dBi Directional Antenna
- 27dBm 2 x 2 Radio
- 1 x Gbps Ethernet Port
- Throughput: Up to 867Mbps



NW257 DS-3WF02C-5AC/O

**5GHz Outdoor Wireless CPE 867Mbps**

- 9dBi Directional Antenna
- 22dBm 2 x 2 Radio
- 2 x Gbps Ethernet Ports
- Throughput: Up to 867Mbps

## Antennas



NW224-3 ANT4958Q13A-DP

**5GHz Outdoor Wireless Omni Antenna 13dBi (with pigtails)**

- Integrates with NW210 Base Station
- Gain: 13dBi
- 360 degree Omni Directional Antenna
- Ideal for Short Range Point to MultiPoint Setups

## Surge Protection



LT01-1

**Single Channel Network Surge Protector 10/100Mbps**

- Rating: 10/100Mbps
- Response Time: 1ns
- Insertion Loss 0.5dB



LT02-2

**Single Channel Gigabit Surge Protector 10/100/1000Mbps + PoE**

- Protection: PoE and PoE+ Compatible with End-span and Mid-span
- Rating: 10/100/1000Mbps
- Response Time: 1ns
- Insertion Loss 0.5dB



LT02-3

**DIN-Rail Mount Gigabit PoE Surge Protector**


- Modular Standard 3.5mm DIN rail mounting for convenient installation
- Supports 10/100/1000Mbps data rates
- Supports 220VAC in-line protection
- Multi-level protection circuit with fast response and residual depress
- Ideal for protection of Gigabit PoE devices against power surges



LT03-2

**PoE ++ Gigabit Ethernet Surge Protector (60Watt)**

- Protection: 802.3af at and bt (15W to 60W)
- Compatible with End-span and Mid-span
- Rating: 10/100/1000Mbps
- Response Time: 1ns
- Insertion Loss 0.5dB

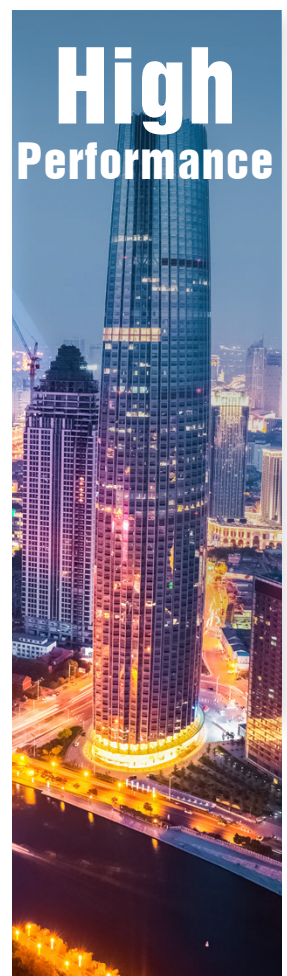

# A WISE CHOICE FOR WIRELESS NETWORKS



## Network Switches

## Fast Ethernet, Managed POE

## Fast Ethernet POE



NW295 DS-3E1105P-EI

**4 Port Fast Ethernet Smart PoE Switch**

- 4 x 10/100Mbps Ethernet PoE Ports
- 1 x 10/100Mbps Ethernet Uplink Port
- Network topology management, alarm push, network health monitor
- Up to 300 m in extend mode



NW296-1 DS-3E1309P-EI

**8 Port Fast Ethernet Smart PoE Switch**

- 8 x 10/100Mbps Ethernet PoE Ports
- 1 x 10/100/1000Mbps Ethernet Uplink Port
- Network topology management, alarm push, network health monitor
- Up to 300m in extend mode



NW297-1 DS-3E1318P-EI

**16 Port Fast Ethernet Smart PoE Switch**

- 16 x 10/100Mbps Ethernet PoE Ports
- 2 x Gbps RJ45/ SFP (Combo) Ports
- Network topology management, alarm push, network health monitor
- Up to 300m in extend mode



NW298-1 DS-3E1326P-EI

**24 Port Fast Ethernet Smart PoE Switch**

- 24 x 10/100Mbps Ethernet PoE Ports
- 2 x Gbps RJ45/ SFP (Combo) Ports
- Network topology management, alarm push, network health monitor
- Up to 300m in extend mode



NW111-4 GNT-P4813V6

**16 Port Fast Ethernet PoE Switch**

- 14 x 10/100Mbps PoE Ports
- 2 x 10/100/1000 Mbps PoE Ports
- 2 x 10/100/1000 Mbps Ethernet Uplink Ports
- 1 x 1000Mbps SFP Uplink Port (Combo)
- Ports 1 to 14 - 30W PoE Maximum
- Ports 15 and 16 - 60W PoE

## Gigabit PoE

## Gigabit PoE



NW101 GNT-P1006GA

**4 Port Full Gigabit PoE Switch**

- 4 x 10/100/1000Mbps PoE+ Ports
- 1 x 10/100/1000Mbps Ethernet Uplink Port
- 1 x Gbps SFP Uplink Port
- Powered by 220VAC



NW295-1 DS-3E0505P-E

**4 Port Full Gigabit PoE Switch**


- 4 x 10/100/1000Mbps PoE+ Ports
- 1 x 10/100/1000Mbps Ethernet Uplink Port
- Plug and Play



NW101-9 GNT-P1012G6

**8 Port Full Gigabit PoE Switch**

- 8 x 10/100/1000Mbps PoE+ Ports
- 2 x 10/100/1000Mbps Uplink Ports
- 2 x Gbps SFP Uplink Ports
- Powered by 220VAC



NW111-6 GNT-P1018G6

**16 Port Full Gigabit PoE Switch**

- 16 x 10/100/1000Mbps PoE Ports
- 2 x Gbps RJ45 Uplink Ports
- 2 x Gbps SFP Uplink Ports
- Ports 1 to 14 - 30W PoE Maximum
- Ports 15 and 16 - 60W PoE
- PoE Watchdog Function
- LED Port Status Indicator



NW115-6 GNT-P1026G6

**24 Port Full Gigabit PoE Managed Switch**

- 24 x 10/100/1000Mbps PoE Ports
- 2 x Gbps SFP Uplink Ports
- Ports 1 to 22 - 30W PoE Maximum
- Ports 23 and 24 - 60W PoE
- PoE Watchdog Function

## IP Decoder



NW276-4

**1/9/16 Channel IP Screen Decoder**

- 16 Channel IPC Decoder
- ONVIF Compliant
- Simple, secure setup

Regal **WhatsApp** is the place to go for a direct line to your branch



SCAN QR CODE FOR ACCESS



Fast, efficient logistics that deliver anywhere.

REGAL



**8 000m<sup>2</sup>**  
Did you know that we have an efficient warehousing and logistics system?



**Rm's**  
We are able to carry a large stock holding.



with the majority of our products being available for delivery within 24 hours.



All our products are backed up by in-store technical experts, free telephonic after-sales and technical support from our National Customer Service Centre.



**6 000**  
Customers have the widest choice of security products to select from.

National Support Centre:  
T: +27 87 802 3920

## Gigabit, Managed POE



NW101-10 GNT-P1002M6

**8 Port Full Gigabit  
Managed PoE Switch**

- 8 x 10/100/1000Mbps PoE+ Ports
- 2 x Gbps SFP Uplink Ports
- Supports IEEE 802.3af/at
- Layer 2 Network management



NW121-10 GNT-P1802M6

**16 Port Full Gigabit  
Managed PoE Switch**

- 16 x 10/100/1000Mbps PoE+ Ports
- 2 x Gbps SFP Uplink Ports
- Supports IEEE 802.3af/at
- Layer 2 Network management



NW114-4 GNT-P2804M6

**24 Port Full Gigabit  
Managed PoE Switch**

- 24 x 10/100/1000Mbps PoE Ports
- 4 x 10/100/1000Mbps Ethernet Uplink Ports
- 4 x 10/100/1000Mbps SFP Uplink Ports (Shared)
- PoE Budget - 400W
- Layer 2 Network management



NW293 DS-3E0508D-O

**8 Port Gigabit Switch  
(Plastic) - 5VDC**

- 8 x 10/100/1000 Mbps Ethernet ports
- Store-and-forward switching
- Supports desktop and wall-mounting
- Plug & play

## Outdoor



NW100-6 GNT-P4804F6

**8 Port Weatherproof  
PoE Switch**

- 6 x 10/100Mbps PoE+ Ports
- 2 x 10/100/1000Mbps PoE+ Ports
- 2 x 10/100/1000Mbps Uplink Ports
- 1 x Gbps SFP Uplink Port

## Industrial



NW101-12

**8 Port Gigabit PoE  
Industrial Switch**

- 8 x 10/100/1000Mbps PoE Ports
- 2 x Gbps SFP Uplink Ports
- Power Input: 90 - 264VAC or DC48 - 52V
- PoE Output: Ports 1 to 6 - 30W, Ports 7 & 8 - 60W

## Industrial Managed



NW100-8

**4 Port Gigabit PoE Managed  
Industrial Switch (No PSU)**

- 4 x 10/100/1000Mbps RJ45 PoE Ports
- 2 x Gbps SFP Uplink Ports
- Operating Temperature: -40 C to 75 C
- L2+ Managed Switch (Support VLAN ACL ERPS ring network)



NW101-13

**8 Port Gigabit PoE Managed  
Industrial Switch (No PSU)**

- 8 x 10/100/1000Mbps RJ45 PoE Ports
- 2 x Gbps SFP Uplink Ports
- Operating Temperature: -40 C to 75 C
- L2+ Managed Switch (Support VLAN ACL ERPS ring network)

## Industrial Power Supply



NW330

**PSU 130W 48VDC Industrial  
Din Rail Single Output**

- IP40 Protection
- Single-Output
- Total 130W Power Supply
- For extreme temperature environments: -40 C to 70 C
- Standard DIN-Rail mounting



NW331

**PSU 260W 48VDC Industrial  
Din Rail Dual Output**

- IP40 Protection
- Dual-Output
- Total 260W Power Supply
- For extreme temperature environments: -40 C to 70 C
- Standard DIN-Rail mounting

## SFP



NW169-11

GNT-SF15M22

**GENATA SFP 1000 BASE-SX Multi-Mode  
mini-GBIC - 550m (Per Pair)**

- 500m transmission with 50/125 m MMF
- Data Rate: 1.25Gbps
- Connector: Duplex LC
- 850nm VCSEL laser and PIN photodetector
- Operating Temperature: 0 to +70 C



NW169-12

GNT-SF12L22

**GENATA SFP 1000 BASE-LX Single-Mode  
mini-GBIC - 20km (Per Pair)**

- 20km transmission with 9/125 m SMF
- Data Rate: 1.25Gbps
- Connector: Duplex LC
- 1310nm FP laser and PIN photodetector
- Operating Temperature: 0 to +70 C

## Media Converters



NW100-7 GNT-2722A

**2 Port Gigabit Ethernet to  
Fibre Media Converter**

- 2 x 10/100/1000Mbps Ethernet Ports
- 2 x Gbps Single Mode SC Fibre Ports
- Transmission distances: Ethernet up to 100m, Fibre up to 10km
- 5VDC 1A Power Supply



NW160 GNT-P2913AB

**PoE Powered Ethernet to Fibre  
Media Converter**

- 1 x 10/100/1000Mbps Ethernet Ports
- 1 x Gbps Single Mode SC Fibre Ports
- Transmission distances: Up to 3km
- Powered by 12-48VDC or PoE (802.3af/at)



NW169-1

GT-802

**1000Base-T to 1000Base-SX  
Multi-Mode Media Converter - 550m**

- Multi Mode Fibre Converter
- 1 x 10/100/1000BASE-T Port
- 1 x 1000BASE-SX Port
- Maximum Distance: 550m



NW169-2

GT-802S

**1000Base-T to 1000Base-LX Single  
Mode Media Converter - 10km**

- Single Mode Fibre Converter
- 1 x 10/100/1000BASE-T Port
- 1 x 1000BASE-LX Port
- Maximum Distance 10km

## Network Accessories

## PoE Injectors &amp; Repeaters



NW143 UTP7201GE-PSE30

**PoE Injector (30W/Gigabit)**

- IEEE 802.3af/at
- 30 Watts Maximum
- 220V AC Input



NW143-2

**PoE Injector (60W/Gigabit)**

- IEEE 802.3af/at
- 60Watts Maximum
- 220V AC Input



NW151

**PoE Injector Gigabit (90Watt)**

- PoE power supply standard Output power consumption up to 90W
- IEEE 802.3af/at/bt
- Working Temperature: -10° - 40°



NW139

GNT-69P31

**3 Port Indoor PoE Extend Switch**

- 2 x 10/100Mbps PoE Downlink Ports
- 1 x 10/100Mbps PoE Uplink Port
- IEEE802.3af/at/bt
- Maximum Transmission Distance: 100m



NW139-2

GNT-6FP31

**3 Port Outdoor PoE Extend Switch**

- 2 x 10/100Mbps PoE Downlink Ports
- 1 x 10/100Mbps PoE Uplink Port
- IEEE802.3af/at/bt
- Maximum Transmission Distance: 100m
- Water-resistant housing



NW139-3

GNT-69P01

**GENATA PoE to DC Splitter (802.3af to 12V 1.6A)**

- PoE Input: 802.3af - 48V
- DC Output: 12VDC 1.6A
- Transmission Speed: 10/100Mbps
- 6KV lightning & 8KV ESD protection



NW139-5

GNT-5313AB

**RJ45 Combiner/Splitter**

- 1 x 2 Port RJ45 Combiner
- 1 x 2 Port RJ45 Splitter
- Maximum Transmission Distance: 100m



NW101-2

GNT-P1006G6

**4 Port Gigabit PoE Extender +1 GB TP + 1 GB SFP uplink (No PSU)**

- 4 x 10/100/1000Mbps PoE+ Ports
- 1 x 10/100/1000Mbps Uplink Port
- 1 x Gbps SFP Uplink Port
- Powered by 12-52VDC or PoE (60W)



CC71

**Passive 10/100 Data & Power Injector Splitter Kit (12-15V)**

- 1 x 10/100Mbps Injector with standard Female DC connector
- 1 x 10/100Mbps Splitter with standard Male DC connector
- Voltage Range: 12-15VDC
- Transmission Distance: 0 to 50m (Cable dependant)
- LED status indicator
- Operating Temperature 10C to 55C



CC72

**Passive Gigabit PoE Injector or splitter from 12V to 56V**

- 12-56VDC input
- 10/100/1000Mbps Throughput
- LED status indicator
- Operating Temperature - 0°C to 65°C

## HDMI Switcher



NW275

**HDMI Bi-Directional 2 x 1 Switcher, 1 x 2 Splitter**

- Supports High Definition 4K@60Hz YUV 4:4:4 and full 3D
- 2 HDMI Hosts to 1 HDMI Monitor
- 1 HDMI Host to 2 HDMI Monitors
- Supports 600MHz/ 6.0Gb per channel bandwidth
- HDMI v1.4, HDCPv2.2



NW270-5

**HDMI Extender Kit up to 70m over CAT5E/6**

- 1080p/ 60fps up to 70m
- 4K up to 40m
- Full HD and 3D Compliant
- Supports DTSHD Master Audio and Dolby TrueHD Audio
- 7.1 Digital HDMI
- EDID Control
- Bi-Directional Infra-Red support



NW270-6

**HDMI Extender Kit up to 200m over CAT5e/6 (Networkable)**

- 1080p/ 60fps up to 200m
- Full HD and 3D Compliant
- Supports TCP/IP for multiple receivers
- Supports USB 2.0 for Mouse and Keyboard
- Bi-directional Infra-Red support



NW274-1

**HDMI Splitter 1 in, 2 out**

- Supports HDMI resolution up to 3840x2160/30Hz
- Supports Full 3D
- Supports HDMI 1.4b
- Maximum input and output HDMI cable length: 8 meters (AWG26)



NW273-1

**HDMI Splitter 1 in, 4 out**

- Supports video resolutions up to 3840x2160/60Hz
- Full HD and 3D Compliant
- EDID Control
- HDMI v1.4 HDCPv2.0

## HDMI Converters



CC27-4

**CCTV AV to VGA & HDMI Converter**

- Supports PAL, NTSC3.58, NTSC4.43, SECAM, PAL/M and PAL/N
- Supports Up-scaler mode and automatically scales to 720/1080p
- Supports VGA auto output



NW276-2

**HDMI to Composite Video Converter (with Audio)**

- Supports resolutions up to 1080p/60fps
- Supports NTSC and PAL formats
- USB power cable



NW278

**HDMI Switch 5 in, 1 out**

- HDMI V1.4 supports resolutions up to 3840x2160/30Hz
- HDCP and EDID Compliant
- Supports all 3D formats
- Switch using a manual button or included IR remote



NW278-3

**HDMI Switch 3 in, 1 out**

- Supports Ultra High Definition resolution 4K@60Hz and full 3D
- Supports manual and automatic switching
- Supports HDCP 2.2
- Supports Consumer Electronics Control (CEC)



CB92-1-4K CB92-2-4K CB92-5-4K

CB92-10-4K CB92-20-4K

- HDMI 2 Cable Male to Male 0.5m
- HDMI 2 Cable Male to Male 2m
- HDMI 2 Cable Male to Male 5m
- HDMI 2 Cable Male to Male 10m
- HDMI 2 Cable Male to Male 20m



## Outdoor Wall Mount Cabinets



CA102

**4U Wall Box Swingframe  
incl Fan and Power (Grey)**

- 570(W) x 500(D) x 178mm(H)
- 100mm Swingframe collar
- Glass front door
- Cable entry top and bottom
- Fan and Plastic 5 way power ( 3pin)
- **CA102-1 CA102-1B CA102-2 CA102-2B**
- **CA102-3 - 4U WALL BOX**



CA111

**6U Wallbox Swingframe  
incl Fan and Power (Black)**

- 267(H) x 570(W) x 600(D) mm
- 200mm Swingframe collar
- Glass front door
- Cable entry top and bottom
- Fan and Plastic 5 way power ( 3pin)
- **CA111-1 CA111-1B - 6U WALL BOX**



CA103

**9U Wall Box Swingframe  
incl Fan and Power (Black)**

- 570(W) x 600(D) x 400mm(H)
- 100mm Swingframe collar
- Glass front door
- Cable entry top and bottom
- Fan and Plastic 5 way power ( 3pin)
- **CA103-4 CA103-B - 9U WALL BOX**



CA104

**12U Wallbox Swingframe  
incl Fan and Power (Black)**

- 570(W) x 600(D) x 534mm(H)
- 200mm Swingframe collar
- Glass front door
- Cable entry top and bottom
- Fan and Plastic 5 way power ( 3pin)
- **CA104-1 CA104-4**
- **CA104-B - 12U WALL BOX**

## Outdoor Wall Mount Cabinets



CA102-4

**IP55 4U Wall Mount Outdoor  
(Grey)**

- IP55
- 4U Swing Frame Wall Mount 19 Outdoor
- Grey
- 600mm x450mm
- Fan and Power not Included
- **CA102-5 - 4U WALL BOX**



CA111-2

**IP55 6U Wall Mount Outdoor  
(Grey)**

- IP55
- 6U Swing Frame Wall Mount 19 Outdoor
- Grey
- 600mm x450mm
- Fan and Power not Included
- **CA103-2 - 6U WALL BOX**



CA103-1

**IP55 9U Wall Mount Outdoor  
(Grey)**

- IP55
- 9U Swing Frame Wall Mount 19 Outdoor
- Grey
- 600mm x450mm
- Fan and Power not Included
- **CA111-3 - 9U WALL BOX**



CA104-2

**IP55 12U Wall Mount Outdoor  
(Grey)**

- IP55
- 12U Swing Frame Wall Mount 19 Outdoor
- Grey
- 600mm x450mm
- Fan and Power not Included
- **CA104-3 - 12U WALL BOX**

## Floor Standing Cabinets



CA118

FIN-FS18U

**18U Floor Standing Cabinet  
incl 4 Fans 3 Shelves (Black)**

- 18U Floor Standing Cabinet - Black
- Inner dimesions 600mm x 800mm
- 4 Fans + 3 Shelves
- Removable Side Panels



CA122

FIN-FS22U-68

**22U Floor Standing Cabinet  
incl 4 Fans 3 Shelves (Black)**

- 22U Floor Standing Cabinet -Black
- Inner dimesions 600mm x 800mm
- 4 Fans + 3 Shelves
- Removable Side Panels



CA127

FIN-FS27U

**27U Floor Standing Cabinet  
incl 4 Fans 3 Shelves (Black)**

- 27U Floor Standing Cabinet -Black
- Inner dimesions 600mm x 800mm
- 4 Fans + 3 Shelves
- Removable Side Panels



CA142

FIN-FS42U

**42U Floor Standing Cabinet  
incl 4 Fans 3 Shelves (Black)**

- 42U Floor Standing Cabinet -Black
- Inner dimesions 600mm x 1000mm
- 4 Fans + 3 Shelves
- Removable Side Panels



## CA142

### 42U Floor Standing Cabinet

## Patch Panel


**CN16-4/6** CATPATCH5E24

**CAT5E UTP 24 Port Patch Panel**

- CAT5E UTP 24 Port Patch Panel
- CN16-6 CAT6 UTP 24 Port Patch Panel


**CA108** FIN-BRUSHPANEL-1

**1 U Brush Panel**

- 1U Brush Panel 483mm(W)x 44mm(H)


**CA105** FIN-BLANKPANEL-1U

**1U Blanking Panel**

- 1U Blanking plate 483mm(W)x 44mm(H)


**CA106**
**2U Blanking Panel**

- 2U Blanking plate 483mm(W)x 89mm(H)

## Cage Nuts


**CA112**  
**Cabinet Nuts and Bolts - Pack of 50**

- Cabinet (Cage) Nuts and Bolts
- For mounting equipment in 19 racks
- 50 per pack


**CA109** FIN-SHELF-1U450  
**Cantilever Shelf 19 Inch 2U 450mm Deep**

- Cantilever Shelf 483mm(W) x 450mm(D)
- CA109-1 Cantilever Shelf 483mm(W) x 330mm(D)


**CA110**  
**Flat Mount Tray 450mm**

- Flat mount tray 483mm(W) x 450mm(D)



## Power


**CA114**  
**5 Way Multiplug with 3m lead - Plastic**

- Plastic 5 Way Multiplug with 3m Lead


**CA114-1** PDU10-IEC  
**PDU 19 1U 10 Way 10A IEC Outlet with On/Off Switch**

- Output Unit: 10 Way IEC C13 Type
- Shell Material: Aluminium
- Shell Color: Black
- Input Plug: 16A South Africa Plug


**CA114-2** PDU10-SA  
**PDU 19 1.5U 10 Way 16A South Africa Outlet with On/Off Switch**

- Output Unit: 10 Way South Africa Type
- Shell Material: Aluminium
- Shell Color: Black
- Input Plug: 16A South Africa Plug
- Bracket Install: Vertical Installation
- Control Indicating Function: Switch
- Protection Monitoring Function: Overload Protection


**CA114-3** PDU6-IEC  
**PDU 19 1U 6 Way 10A IEC Outlet with On/Off Switch**

- Output Unit: 6 Way IEC C13 Type
- Shell Material: Aluminium
- Shell Color: Black
- Input Plug: 16A South Africa Plug


**CA114-4** GT-802S  
**PDU 19 1.5U 6 Way 16A South Africa Outlet with On/Off Switch**

- Output Unit: 6 Way South Africa Type
- Shell Material: Aluminium
- Shell Color: Black
- Input Plug: 16A South Africa Plug
- Bracket Install: Vertical Installation
- Control Indicating Function: Switch
- Protection Monitoring Function: Overload Protection

## Fans


**CA113**  
**IP55 2 Way fan unit for Wall Mount Cabinets**

- 2 Fans (120x120x38mm)
- 220VAC
- IP 55 Rated


**CA113-1**  
**Single fan units for Wall Mount Cabinets**

- Rated Voltage: 220 - 240VAC
- Dimensions: 120x120x38mm
- Rated Speed: 2700/3100 RPM +/- 10%
- Rated Current: 0.14/0.12A
- Operating Temperature: -10 to +70 degrees Celcius

# TRANSFORMING DATA TRANSMISSION


Devices can extend up to 100m from the extender, and up to a maximum of 130m from the extender to PoE switch. This gives a total range of 230m.



**NW139**  
GNT-69P31

## Cascade PoE Transmitter

### Data and Power

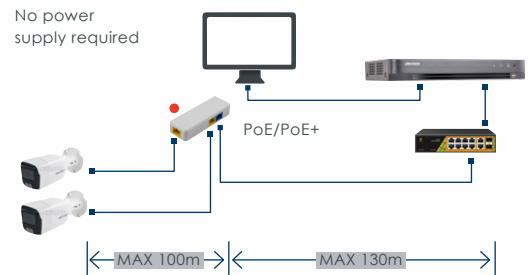


Intelligent PoE splitter, Support IEEE 802.3af PoE



**NW139-3**  
GNT-69P01

## PoE to DC Splitter

### Power indicator light

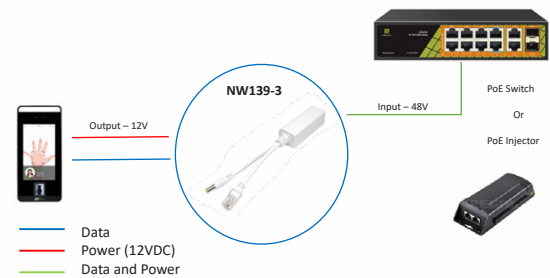


Allows you to combine 2 network ports over a single cable and then split the ports.



**NW139-5**  
GNT-5313AB

## RJ45 Combiner / Splitter

### Easy Installation

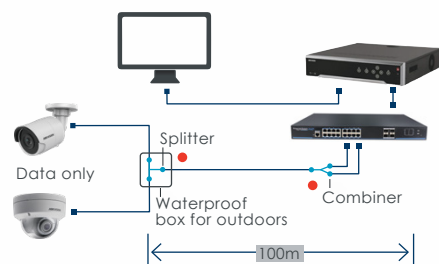


PoE-powered fibre media converter with up to 3km range and 1000Mbps data speed.



**NW160**  
GNT-P2913AB

## PoE Powered Ethernet to Fibre Media Converter

### Get up to 3km Connection

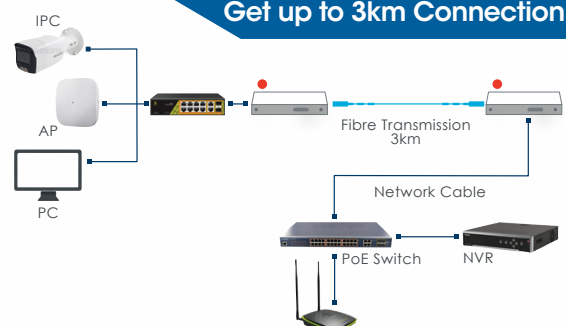





# VALUE ADDED SERVICES

«REGAL»



PRODUCT  
TRAINING



PRODUCT  
REPAIRS



TECHNICAL  
SUPPORT

«REGAL»

**Your one stop security shop**

From our warehouse to your front door

- Delivery available across SA
- Quotes are customised for your business
- Secure payment gateway

[www.regalsecurity.co.za](http://www.regalsecurity.co.za) | National Support Centre: 087 802 3920

## CONTACT US

### BRANCHES

#### Gauteng

Alberton: 087 537 4166  
Balfour Park: 011 640 2288  
Boksburg: 011 918 8505  
Centurion: 012 653 0653  
Edenvale: 011 453 0229  
Fourways: 011 467 8817  
Krugersdorp: 087 092 8100  
Linden: 011 888 5666  
Longmeadow: 011 454 8009  
Lynnwood: 012 460 4550  
Midrand: 011 312 7576  
Montana: 087 802 3939  
Rodepoort: 011 760 1149  
Strijdom Park: 011 791 4770  
Vanderbijlpark: 016 931 0116  
Xavier (JHB South): 011 433 8943  
Exports: 087 537 4100

#### Eastern Cape

East London: 043 735 4537  
Gqeberha (PE): 041 364 3885

#### Free State

Bloemfontein: 051 447 6969

#### KwaZulu Natal

Durban: 031 263 0901  
Pietermaritzburg: 087 803 4544  
Pinetown: 031 701 3222

#### Mpumalanga

Emalahleni (Witbank): 013 656 4140  
Mbombela (Nelspruit): 013 753 2831

#### Limpopo

Polokwane: 015 296 0531

#### Western Cape

Bellville: 021 949 6330  
George: 087 537 4155  
Northgate: 021 510 1411  
Ottery: 021 745 4989  
Somerset West: 021 013 7400

### CUSTOMER SUPPORT

#### Accounts

email  
[accounts@regalsecurity.co.za](mailto:accounts@regalsecurity.co.za)

#### Sales

email  
[sales@regalsecurity.co.za](mailto:sales@regalsecurity.co.za)

#### National Support Centre

Tel: 087 802 3920  
email  
[nsc.support@regalsecurity.co.za](mailto:nsc.support@regalsecurity.co.za)

**Need Technical Support?**

Call ANY Regal branch and dial 2

SCAN TO VIEW ALL  
REGAL BROCHURES



WhatsApp us on 081 475 5079



COMPLETE SECURITY SOLUTIONS AT [WWW.REGALSECURITY.CO.ZA](http://WWW.REGALSECURITY.CO.ZA)